

# LG Gen2 Wireless X-ray Detectors



Available sizes: 10x12", 14x17", 17x17"

## Ensure Diagnostic Accuracy Superior Image Quality

LG DXD delivers high resolution and clear image quality without image distortion using 16-bit image processing and 140 micron pixel pitch.



## Lightweight Durable Flat Panel Detectors

**IP68 Water Resistance and Dustproof**



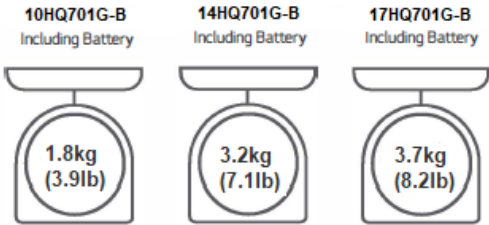
**Solids Level 6**  
Protected against dust intrusion




**Liquids Level 8**  
Protected against continuous liquid immersion

**Magnesium & Carbon-fiber Body**  
With a super strong body that combines carbon-fiber with magnesium, LG Gen2 DXDs are exceptionally strong and durable.

### Product Weight






### Maximum Load Weight

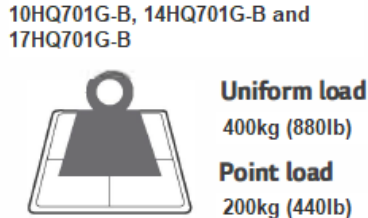



## Specification

<b>Digital X-ray Detector</b>		10HQ701G-B	14HQ701G-B	17HQ701G-B
Model Name		10HQ701G-B	14HQ701G-B	17HQ701G-B
		(Wired/Wireless)	(Wired/Wireless)	(Wired/Wireless)
External Dimension / Weight		282 x 333 x 15.6 mm	384 x 460 x 15.6 mm	460 x 460 x 15.6 mm
				
		1.8 kg (incl. battery)	3.2 kg (incl. battery)	3.7 kg (incl. battery)
Intended Use		General Radiography		
TFT Type		A-si		
Scintillator		Cesium		
Pixel Size		140µm		
Image Area	X-ray sensitive Pixel	2048 x 1792	2560 x 3072	3072 x 3072
	X-ray sensitive Area	286.72 mm x 250.88 mm	430.08 x 358.40 mm	430.08 x 430.08 mm
MTF	MTF @ 0.5lp/mm	(Typ.) 89%		
DQE	DQE @ 0.1lp/mm	(Typ.) 72%		
A/D Conversion		16bit		
Data Output		16bit		
Communication	Type	(Wired/Wireless)	(Wired/Wireless)	(Wired/Wireless)
	Wireless	IEEE802.11a/b/g/n/ac, 2.4GHz/5GHz	IEEE802.11a/b/g/n/ac, 2.4GHz/5GHz	IEEE802.11a/b/g/n/ac, 2.4GHz/5GHz
AED (Automatic Exposure Detection)		Supported		
Cycle Time		Wired 4.5sec / Wireless 5sec	Wired 4.5sec / Wireless 5sec	Wired 4.5sec / Wireless 5sec
Full Image		Wired 1.5 sec / Wireless 2 sec	Wired 1.5 sec / Wireless 2 sec	Wired 1.5 sec / Wireless 2.5sec
Durability	Max Load Weight	Full (Uniform Load) : 400kg Local (Point Load) : 200kg	Full (Uniform Load) : 400kg Local (Point Load) : 200kg	Full (Uniform Load) : 400kg Local (Point Load) : 200kg
	Resistance Rating	IP68		
	Sensor Protection Plate	Carbon Fiber Plate		
Battery	Operating Time	(Typ.) 300 shots/ 7.5 hrs (Condition : Cycle time 90sec)	(Typ.) 300 shots/ 7.5 hrs (Condition : Cycle time 90sec)	(Typ.) 300 shots/ 7.5 hrs (Condition : Cycle time 90sec)
	Duration in Standby	Typ.7.7hrs	Typ 7.7hrs	Typ.7.7hrs
	Charging Time	3 Hours	3 Hours	3 Hours
	Hot Swap	Yes (1min)	Yes (1min)	Yes (1min)
<b>Acquisition Workstation Software</b>				
Installation Requirement	Operating System (min)	Microsoft Windows 7 or above		
	Database	MariaDB		
	Processor Options	Intel CPU Desktop 5th Gen i5 or above		
	RAM (min)	8GB or above		
	HDD (min)	250GB or above		

Distribuidor Autorizado

